


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 27 TOWNSHIP 17 RANGE 5
DATE: --10-6-99-- 8-6-04
PARTY CHIEF: -Kiste- Wilcoxon
CREW: _____
TYPE OF MARKER: Brass plug in brass plate 4" dn
METHOD OF ESTABLISHMENT: County: 10-12-94

IN. S.P.C. E ZONE, NAD 83
NAME: 17052706
N: 515497.2140(m)
E: 76786.7190(m)

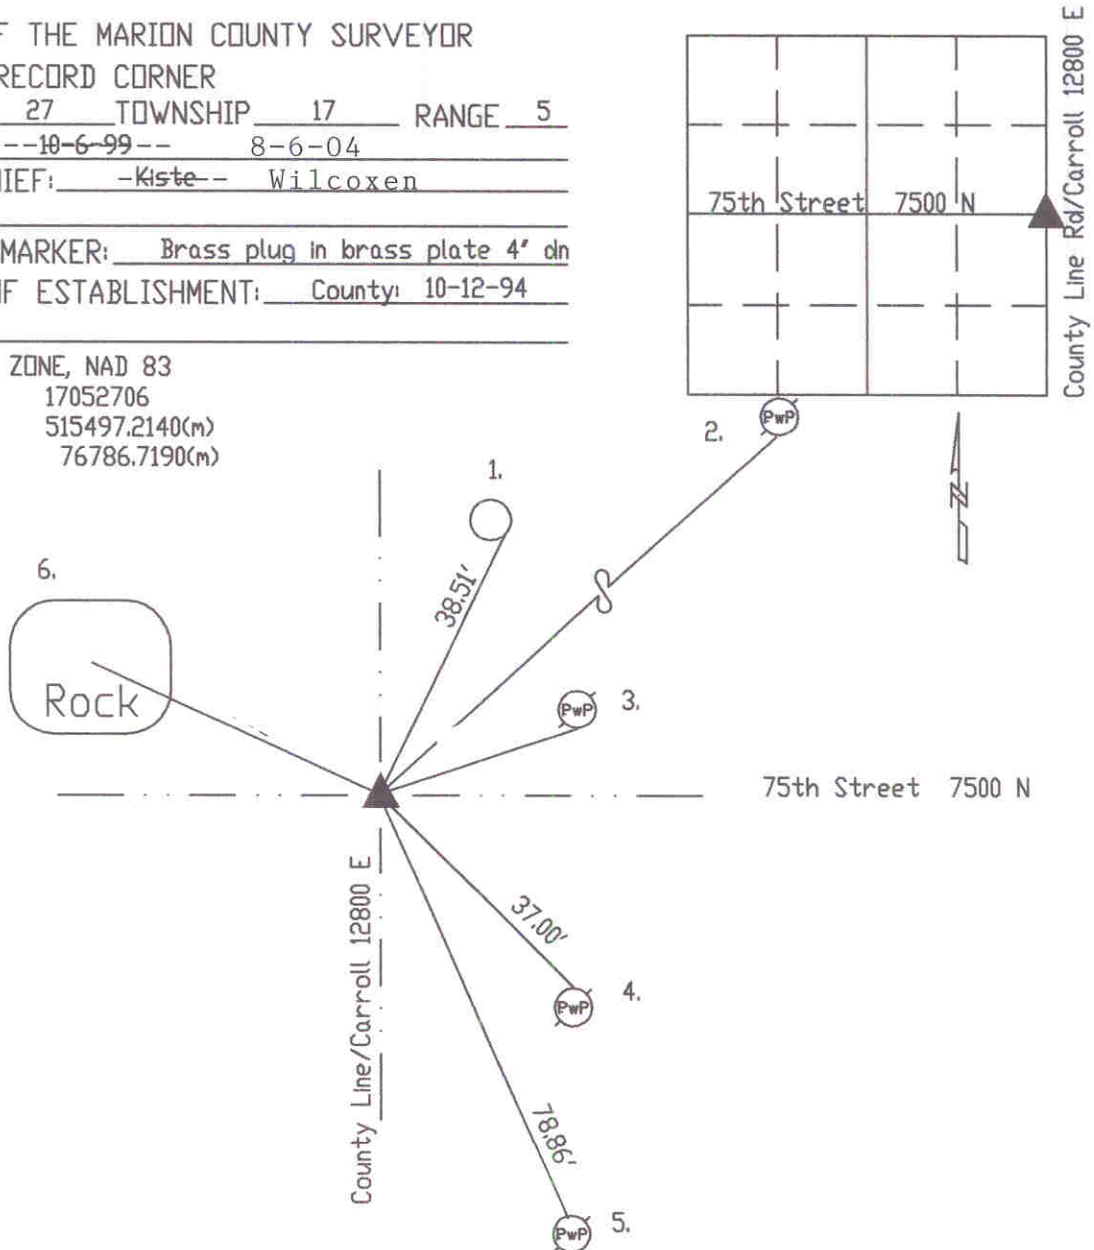

Original post set 1821 by Laughlin with witnesses: 12" beech N 52 W 17 links, 10" beech S 76 E 11 links. Hosbrook 2-1849 per Lawrence Township Legal Survey Book pg. 15 & 36 called corner 'J' one witness still standing. New witness taken. Legal 4-1897 by Coyner per Lawrence Township Legal Survey Book pg. 36 called corner 'J' and called 'stone X - stone W N 45 W 38 links'. This indicates a stone at corner with stone witness bearing N 45 W 38 links. 9-5-52 Cathcart called stone at corner. 8-22-63 Burres called 1/2" pipe at corner. 12-11-70 Straber called PK nail. The ties are within several tenths of a foot of matching '63 ties. 5-30-72 SeFranka called iron pipe bent 0.3' dn. 4-28-75 Fortner called iron pipe. 5-26-77 Hancock called brass plug & plate set over iron pin. 5-26-77 re-drawn. Schneider Job#16392 called 'x' on brass plug found. Re-tied 10-12-94 by Wilcoxon. Re-tied 10-6-99 by Kiste.

SC752706

REF.	DISTANCE	DESCRIPTION
1.	38.51'	PK nail SE corner of post for 'gas & telephone utility'
2.	68.53'	PK nail S PwP#17-251HB 6'up
3.	41.09'	PK nail S PwP#10-251HB 36'up
4.	37.00'	PK nail NE PwP#81-281HA 15'up
5.	78.86'	PK nail E PwP#100-281HA 12'up
6.	46.88'	Cut 'x' in large rock